
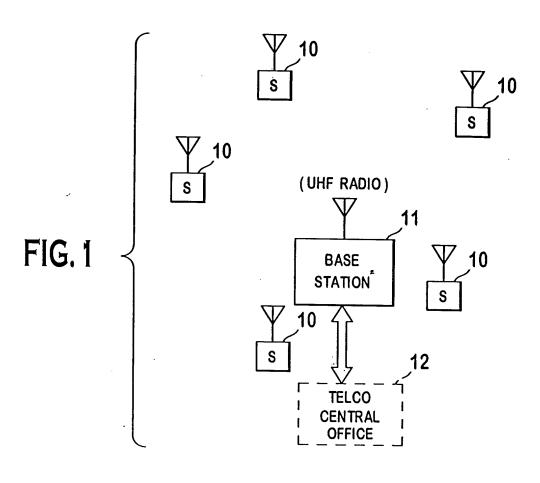
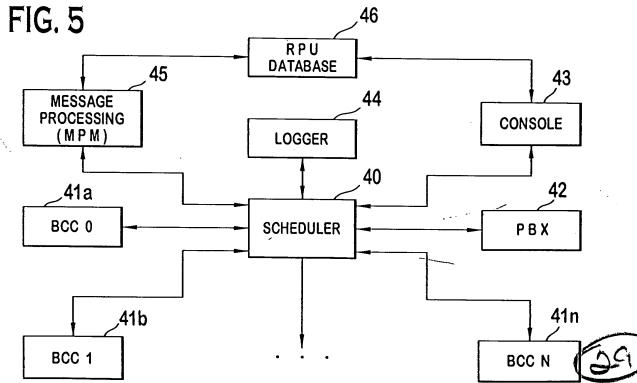


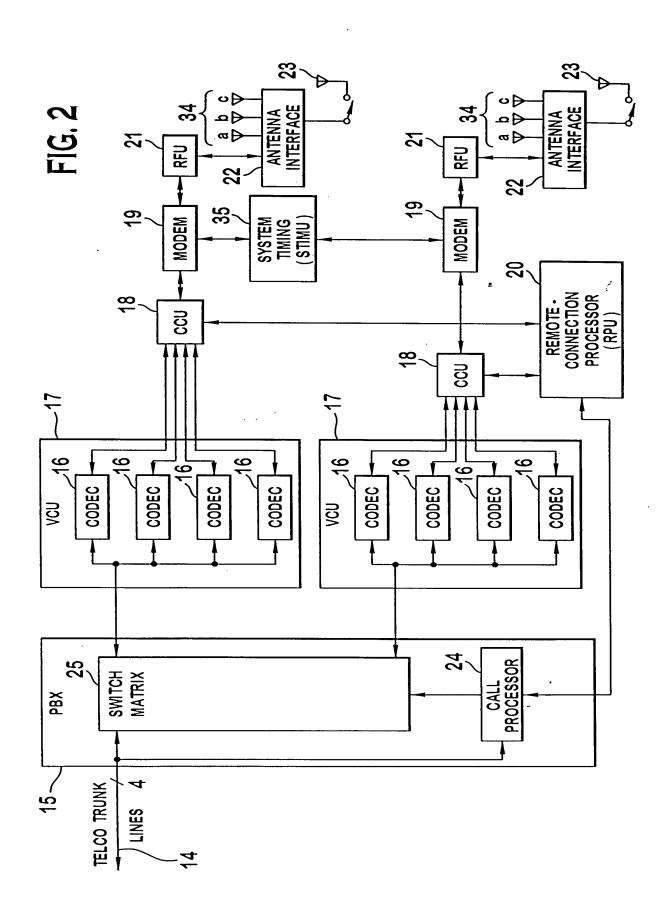

6393002







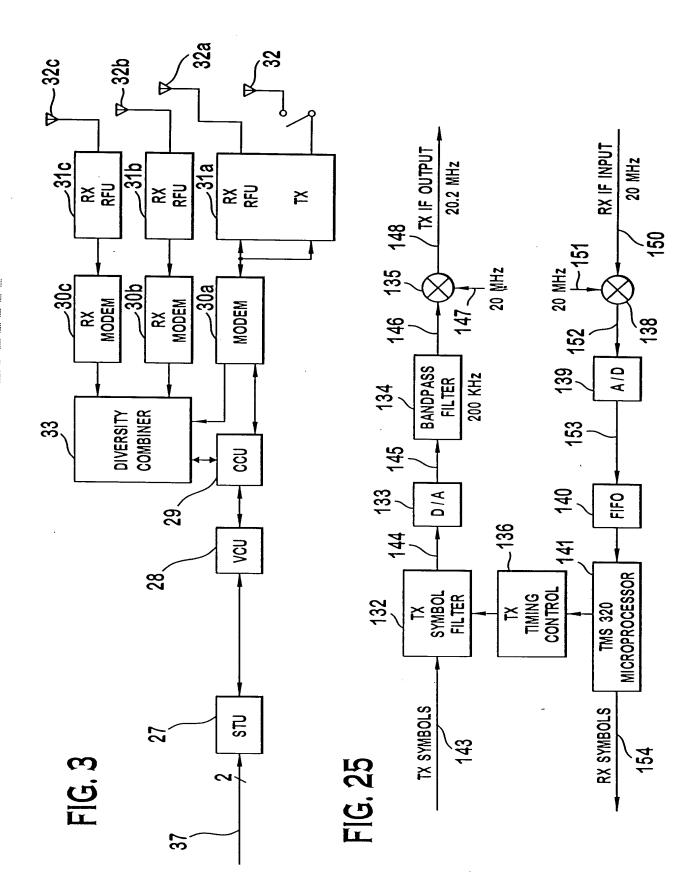
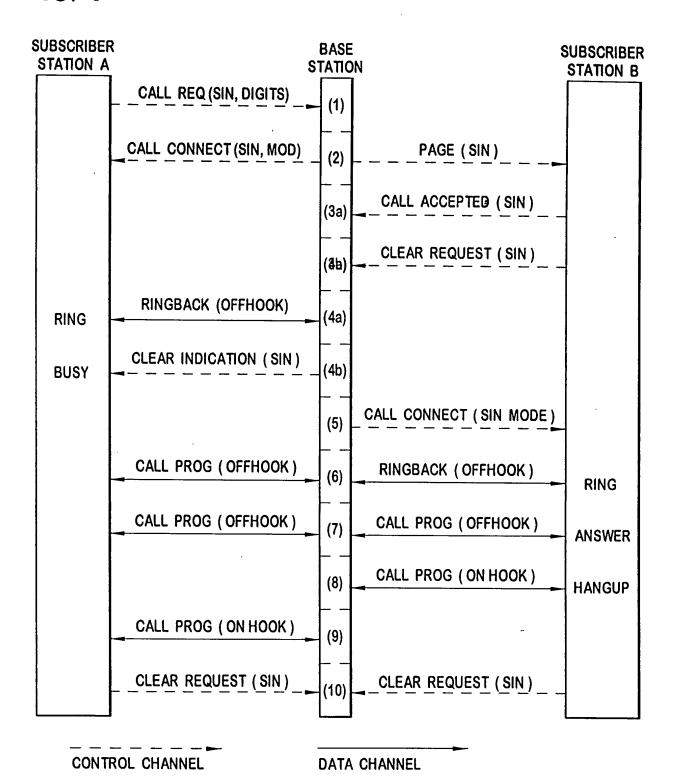
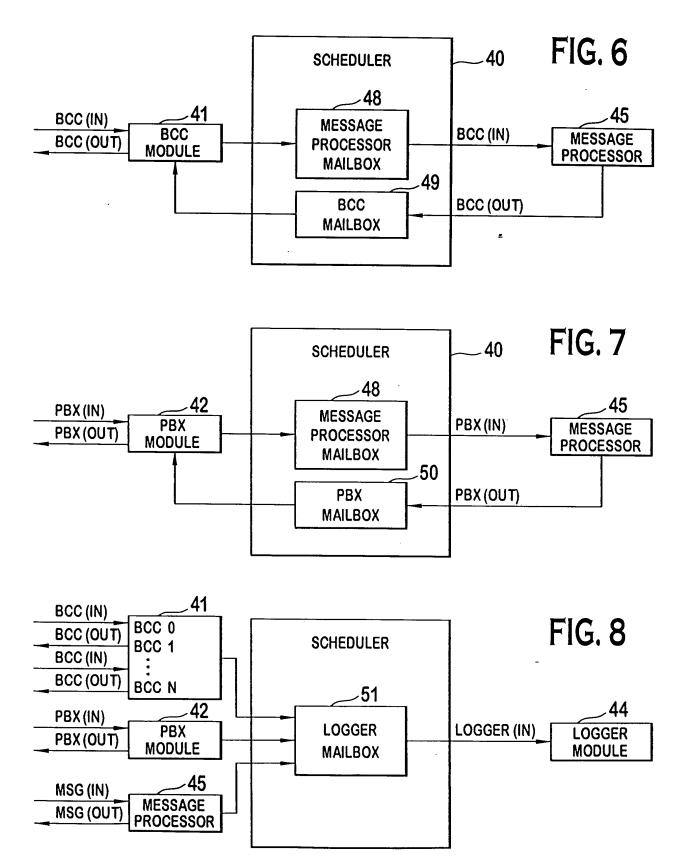


FIG. 4





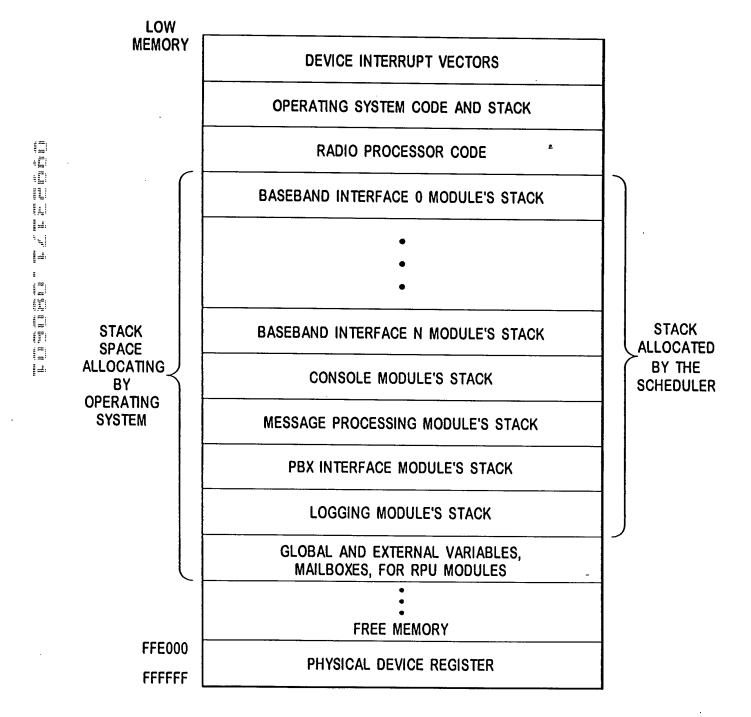
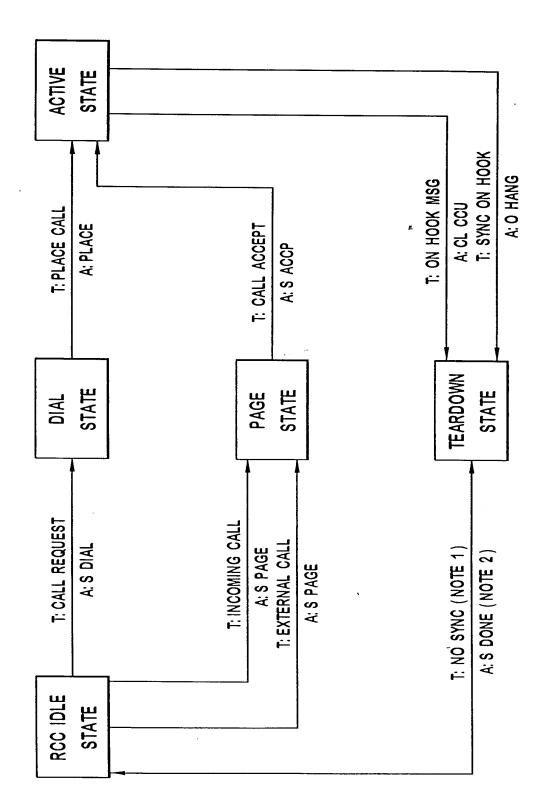
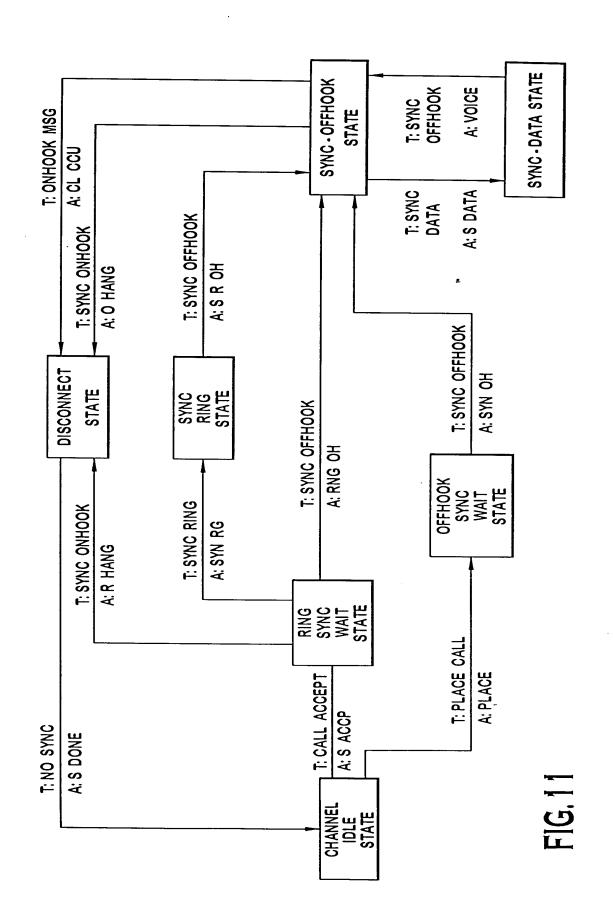
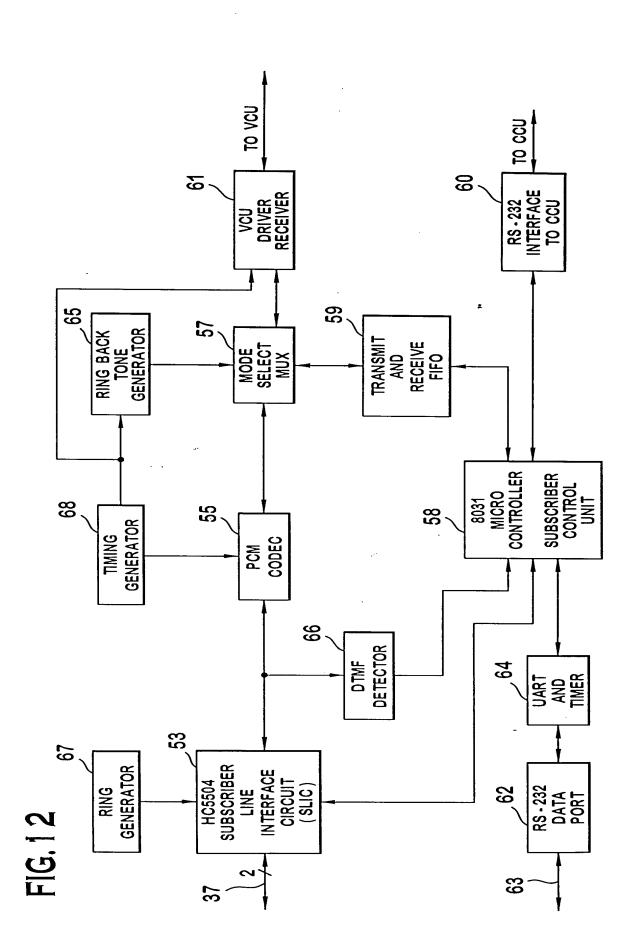


FIG. 10










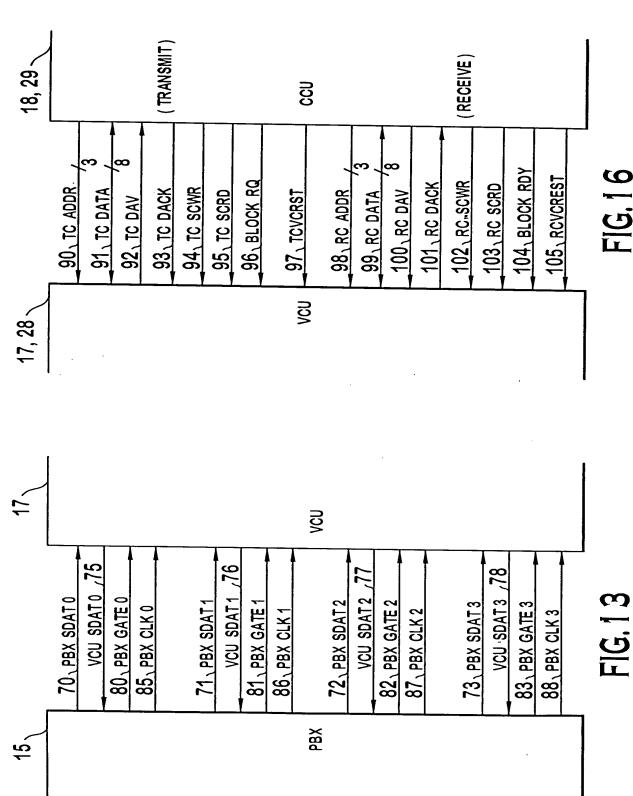


FIG. 16

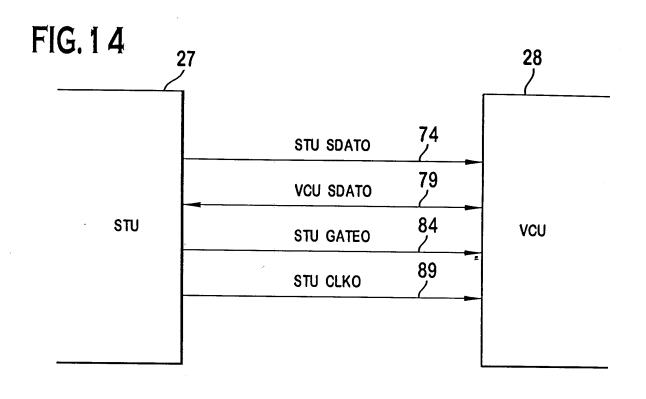

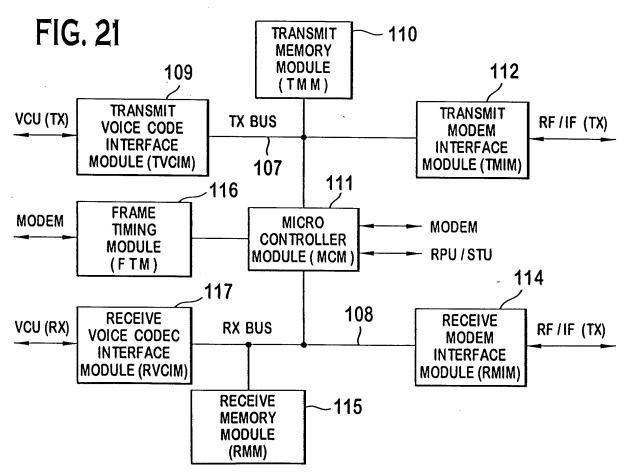

To the second state of the

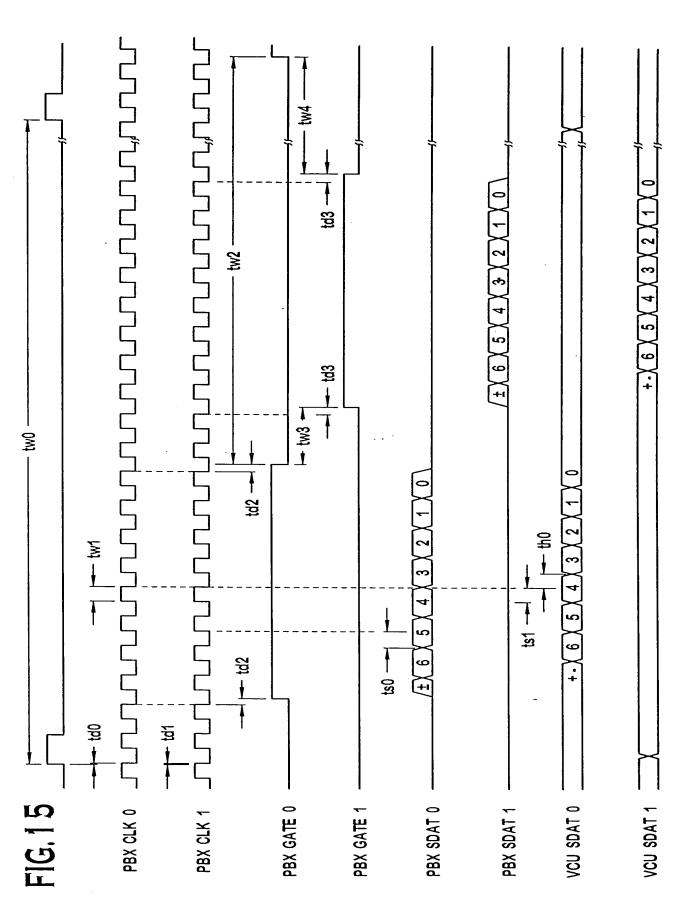



+ ts3 1 \$3 호 + td4 5 <u>+</u> th2 1 tw2 — ts2 (CONTROL) (STATUS) | 16 SYMBOLS BEFORE <u>₹</u> 丰 <u>z</u> TCADDR TCSCWR TCSCRD TCDATA TCDACK TCDAV FIG. 17

+ \$3 ±

. 62

BLOCK RQ

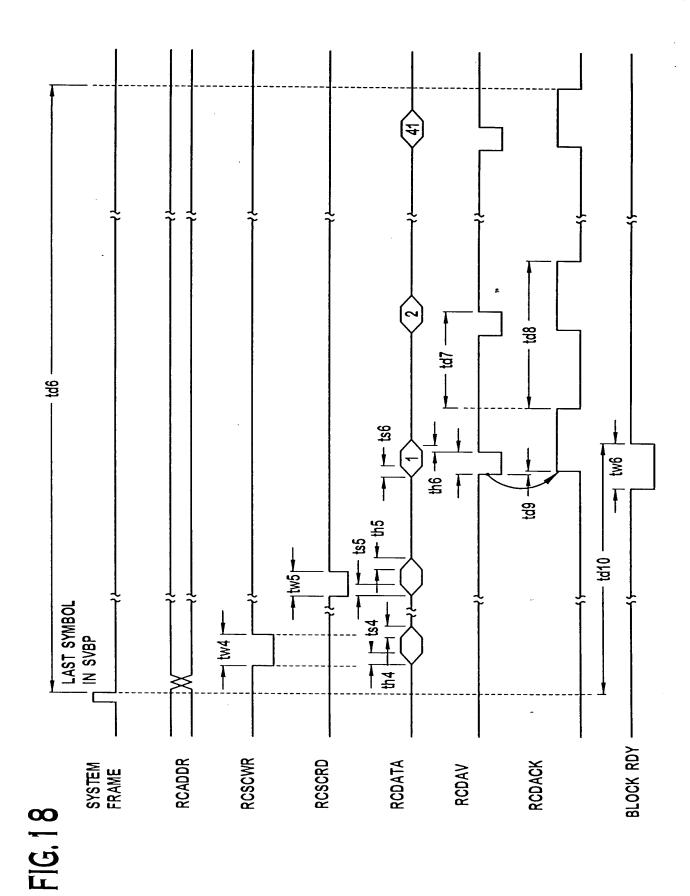


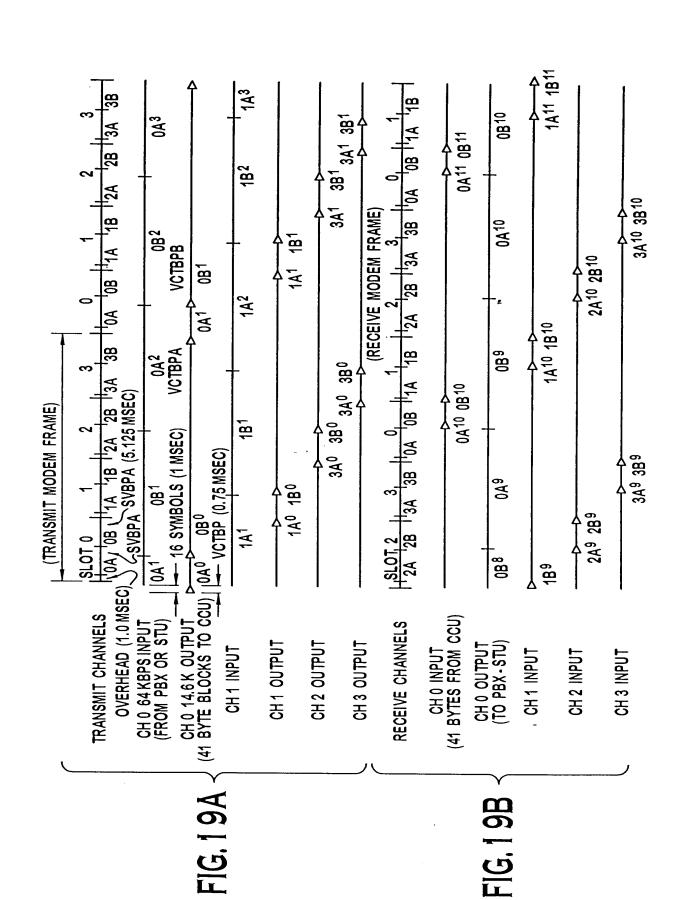

RECEIVE CHANNELS

CH 2 INPUT 14.6 KBPS (41 BYTE BLOCK FROM CCU)

CH 2 OUTPUT 64 KBPS (TO PBX)

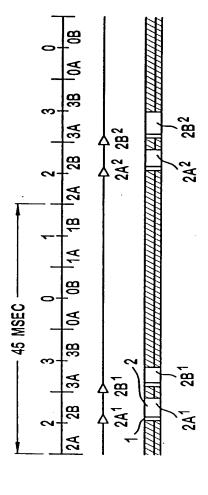


TRANSMIT CHANNELS

CH 2 INPUT 64 KBPS (FROM PBX)

FIG. 20B

CH 2 OUTPUT 14.6 KBPS (41 BYTE BLOCK TO CCU)

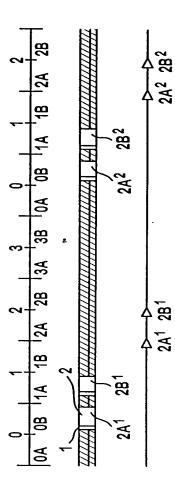

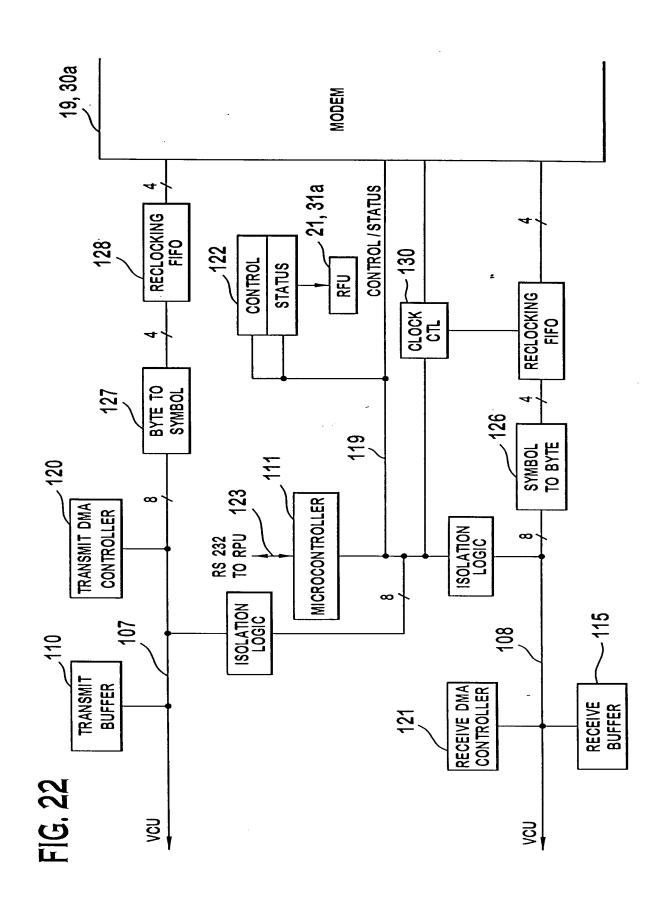


FIG. 23

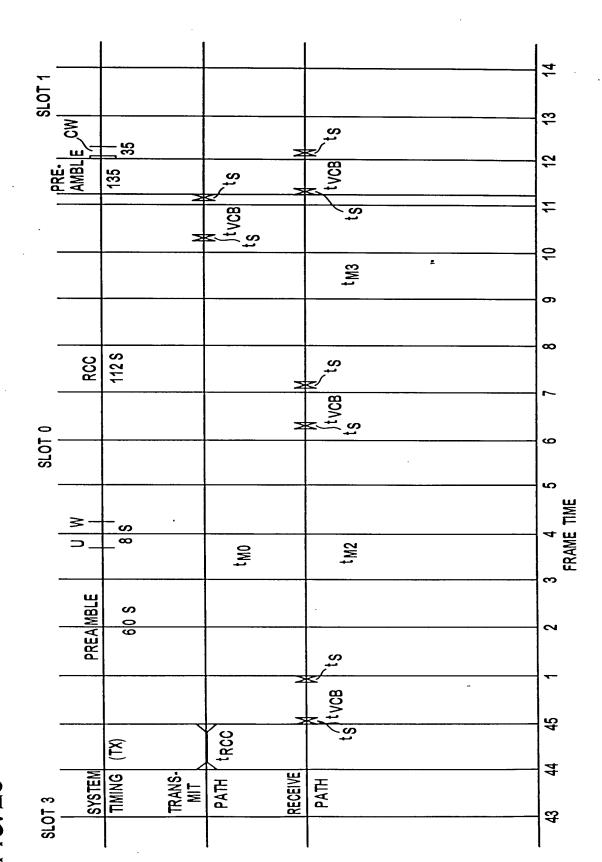


FIG. 24

